




### Key Features


- Available in screen sizes 46" & 55"
- Seamless walls with super slim 5.7mm bezel
- Embedded video matrix processor
- Automatic tiling across multiple screens
- Smart temperature control system
- Commercial grade Samsung screen for 24/7 use
- Vivid colours with wide viewing angle
- Portrait or landscape installation
- Eco-friendly power timer
- Free scheduling software
- Scrolling text messages to compliment your content
- Optional network upgrade for remote access
- Optional built-in 3G router or WiFi card
- HDMI, VGA and USB inputs
- LED backlight

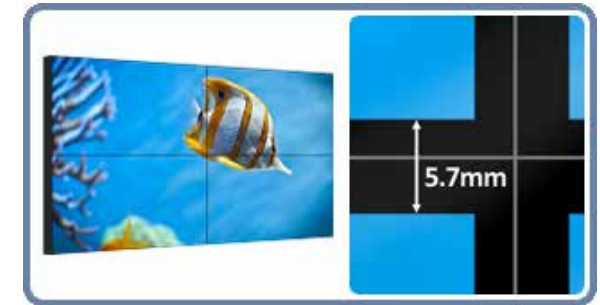


Super slim bezels from just 5.7mm



Multiple Input Options supporting a wide range of video and audio inputs

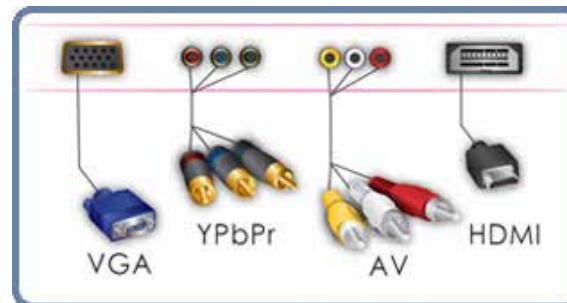

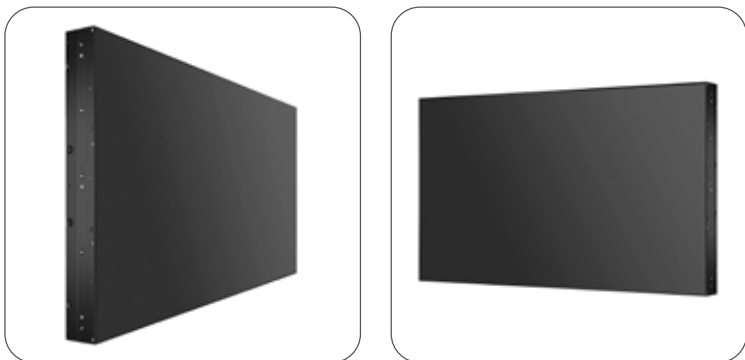

Display Size	46 Inch Super Narrow Bezel	46 Inch Super Narrow Bezel with High Brightness	55 Inch Super Narrow Bezel	55 Inch Super Narrow Bezel with High Brightness
Screen Size (active area)	46 inch		55 inch	
Bezel Size (mm)	Bottom/right: 2.4, Top/left: 4.3		Bottom/right: 1.9, Top/left: 3.8	
Resolution	1366x768		1920x1080	
Aspect Ratio	16:9			
Pixel Pitch (HxW mm)	0.7455x0.7455		0.63x0.63	
Unit Size (WxHxD mm)	1025.65x579.84x95.83		1215.3x686.1x122.3	1215.3x686.1x95.83
Response Time	8ms			
Displayable Colours	16.7M			
Brightness (cd/m <sup>2</sup> )	450	700	450	700
Contrast Ratio	3000:1		4000:1	
Colour Temperature	10000K			
Viewing Angle	178°			
Active Area (HxW mm)	1018.3x572.5		1209.6x680.4	
Power Consumption	200W typical operation (300W Max)	300W Max	250W Max	
Power Supply	100V ~ 240V(50/60Hz)			
Power Management	VESA DPMS			
Backlight Life	50000 hours			
Input Signal	Video, VGA, DVI, RGB/HV, YPbPr			
PC Input - Video	1.0V p-p 75ohm NTSC/PAL			
PC Input - VGA	0.7V p-p, 75ohm VGA60, SVGA60, XGA60, UXGA60 1280x720(60Hz), 1360x768(60Hz), 1920x1080(60Hz)			
PC Input - DVI	DVI VGA60, SVGA60, XGA60, SXGA60, UXGA60			
PC Input - RGB/HV	0.7V p-p, 75ohm VGA60, SVGA60, XGA60, SXGA60, UXGA60 1280x720(60Hz), 1360x768(60Hz), 1920x1080(60Hz)			
Working Temperature	0-50°C			
Working Humidity	20-80%			
Working Pressure	800-1114 hPa (Altitude: 0-2,000m)			
Standard Accessories	Remote control, AC Power Cable, Scheduling Software CD, Key, User Manual, VGA Cable, OSD Control Box			